

Legendary
Quality
Since 1930





About General Floorcraft

ALL METAL CONSTRUCTION



SOLID CAST ALUMINUM ASK YOURSELF, WHAT'S YOUR MACHINE MADE OF?

We use only the highest quality premium motors and gearboxes. Our legendary quality delivers a supremely balanced and whisper-quiet performance, this results in a long lasting and very reliable floor equipment. The success of our company depends on more than just making great products but also delivering outstanding customer service.



Floor Machines

- KCD Series.....4,5
- KC Series.....6,7
- GVS Series.....8,9
- GFX Series.....10,11
- MBL-17.....12,13

Burnishers

- DC Series.....14,15

Air Mover

- AM-3000.....16,17

Industrial Steamer

- G-Steam.....18,19

Vacumms

- G-60 (AQUA).....20,21
- G-60 & G-100.....22,23
- G-200.....24,25

Accessories

- Solution Tank, Brushes, Pads & Pad Drivers.....26

THE PIVOT

- What is *The Pivot*?.....27





KCD Series

EXTRA HEAVY DUTY FLOOR MACHINE



The KCD series features the most powerful extra heavy duty floor machines in the market today.

- Perfect for sanding to concrete preparation to stripping to deep scrubbing or shampooing to cleaning.
- Cool running powerful 1½ hp motor. 120 or 220 volts.
- One piece 360 degree non-marking bumper.
- 6" shock absorbing flip up non-marking wheels.
- Unique *Pivot System* for perfect balance and easy maneuverability.
- All cast aluminum construction and chrome handle.
- Solution tank "ready" system.
- Includes a red 50ft (15.2 m) safety cable with waterproof jacket.
- Dual non-metallic safety switch tabs.
 - Reinforced steel triple planetary gear.
 - 5 years motor and gear box warranty.

KCD Series	Current	Gear Box	Motor AC	Pad Size	Pad Speed	Productivity	Weight
KCD-17	15 amp (120V) / 8,3 amp (230V)	Triple Planetary	1.5 hp (1,119 w)	17" (43.2 cm)	175 rpm	2,300ft ² /hr	107 lbs (48.5 kg)
KCD-19	15 amp (120V) / 8,3 amp (230V)	Triple Planetary	1.5 hp (1,119 w)	19" (48.2 cm)	175 rpm	2,500 ft ² /hr	116 lbs (52.5 kg)
KCD-21	15 amp (120V) / 8,3 amp (230V)	Triple Planetary	1.5 hp (1,119 w)	21" (53.3 cm)	175 rpm	3,000 ft ² /hr	123lbs (55.8 kg)
KCD-23	15 amp (120V) / 8,3 amp (230V)	Triple Planetary	1.5 hp (1,119 w)	23" (58.4 cm)	175 rpm	3,300 ft ² /hr	130 lbs (59 kg)

*Brushes, pads, pad drivers and solution tank available.







KC Series


**HEAVY DUTY
FLOOR
MACHINE**



The KC series features four durable models to choose from.

This Heavy Duty machine strips, scrubs, cleans, polishes, buffs and shampoos. It is the perfect choice for cleaning and maintenance professionals.

- Cool running powerful 1 hp motor. 120 or 220 volts with dual capacitors.
- One piece 360 degree non-marking bumper.
- 6" shock absorbing flip up non-marking wheels.
- Unique **Pivot System** for precision balance and maneuverability.
- All cast aluminum with chrome handle.
- Solution tank "ready" system.
- Includes red safety cable with waterproof jacket.
- Dual non-conductive switch lever.
- 5 years motor and gear box warranty.

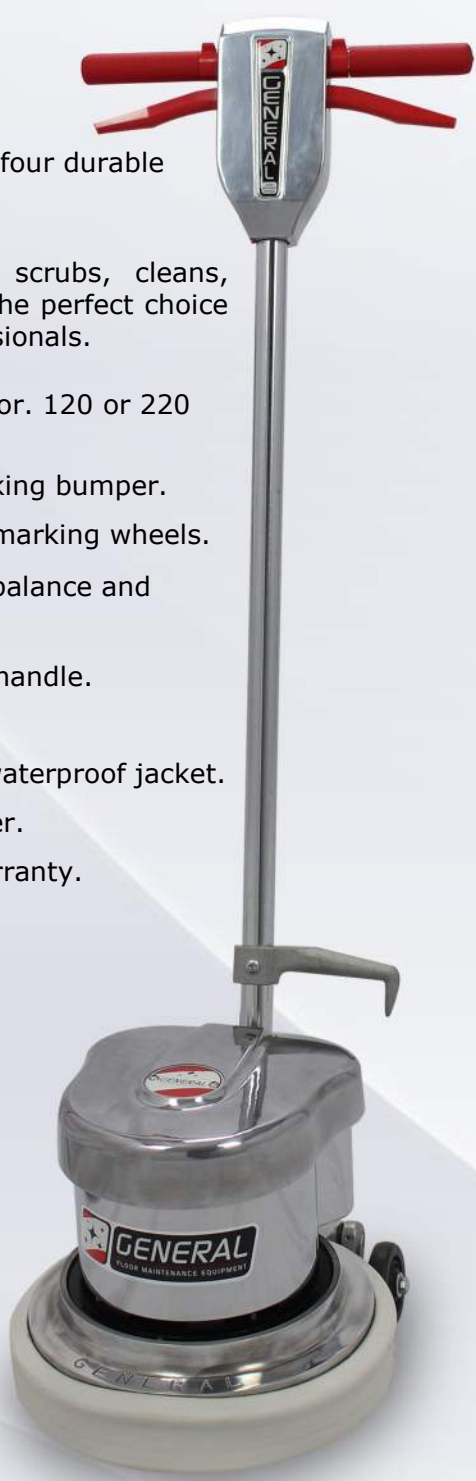

KC Series	Cable	Current	Gear Box	Motor AC	Pad Size	Pad Speed	Productivity	Weight
KC-13	25 ft (15.2 m)	12.6 amp (120V) / 6.8 amp (230V) - 50Hz	Dual Planetary	1.0 hp (746 w)	13" (33 cm)	175 rpm	1,976 ft ² /hr	91 lbs (41.3 kg)
KC-17	50 ft (15.2 m)	12.6 amp (120V) / 6.8 amp (230V) - 50Hz	Dual Planetary	1.0 hp (746 w)	17" (43.2 cm)	175 rpm	2,000 ft ² /hr	98 lbs (44.5 kg)
KC-19	50 ft (15.2 m)	12.6 amp (120V) / 6.8 amp (230V) - 50Hz	Dual Planetary	1.0 hp (746 w)	19" (48.2 cm)	175 rpm	2,448 ft ² /hr	107 lbs (48.5 kg)
KC-21	50 ft (15.2m)	12.6 amp (120V) / 6.8 amp (230V) - 50Hz	Dual Planetary	1.0 hp (746 w)	21" (53.3 cm)	175 rpm	3,000 ft ² /hr	114 lbs (51.7 kg)

*Brushes, pads, pad drivers and solution tank available.



GVS Series

VARIABLE SPEED FLOOR MACHINE



The GVS series offers three durable models that are able to vary the speed of the motor using a handy knob without having to stop the floor machine.

- RPM's from 160 to 330 RPM's
- Vary the speed during operation.
- 50 ft (15.2 m) cable with waterproof jacket.
- Unique *Pivot System* for precision balance and maneuverability.
- Solution tank "ready" system.
- Heavy Duty switch.
- One piece 360 degree non-marking bumper.
- 2 years motor and gear box warranty.

The GVS machine is used for stripping, scrubbing and cleaning at the low speed. Higher speed is for polishing, buffing or carpet bonnet cleaning.

GVS	Current	Gear Box	Motor AC	Pad Size	Pad Speed	Productivity	Weight
GVS-17	15 amp (115V) / 8 amp (230V) - 50/60 Hz	Triple Planetary	1½ hp (1,119 w)	17" (43.2 cm)	160-330 rpm	2000-3000 ft²/hr	91 lbs (41.3 Kg)
GVS-19	15 amp (115V) / 8 amp (230V) - 50/60 Hz	Triple Planetary	1½ hp (1,119 w)	19" (48.2 cm)	160-330 rpm	2300-3900 ft²/hr	100 lbs (45.3 kg)
GVS-21	15 amp (115V) / 8 amp (230V) - 50/60 Hz	Triple Planetary	1½ hp (1,119 w)	21" (53.3 cm)	160-330 rpm	2500-4300 ft²/hr	107 lbs (48.5 kg)

*Brushes, pads, pad drivers and solution tank available.





GFX series

**HEAVY DUTY
FLOOR MACHINE**



The GFX series are proven performers, that require little maintenance while providing superior results.

- This heavy duty machine strips, scrubs, cleans, polishes, buffs and shampoos like no other.
- Unique *Pivot System* for precision balance and maneuverability.
- 50 ft (15.2 m) cable with waterproof jacket.
- One piece 360 degree non-marking bumper.
- Dual non-conductive switch levers.
- Solution tank "ready" system.
- 2 years motor and gear box warranty.

The perfect choice for cleaning and maintenance professionals at an excellent value.



GFX	Current	Gear Box	Motor AC	Pad Size	Pad Speed	Polishing Performance	Weight
GFX-17	13 amp (120V) / 6.5 amp (240V)	Triple Planetary	1 1/2 hp (1,119 w)	17" (43.2 cm)	175 rpm	2,000 ft ² /hr	106 lbs (48 kg)
GFX-20	13 amp (120V) / 6.5 amp (240V)	Triple Planetary	1 1/2 hp (1,119 w)	20" (50.8 cm)	175 rpm	3,000 ft ² /hr	122 lbs (55.3 kg)

*Brushes, pads, pad drivers and solution tank available.



MBL-17

MARBLE MACHINE



MBL-17 is the only machine in the world with a one piece solid cast iron apron. With it's exclusive design, machine weighs 150 pounds. The MBL-17 machine will increase your efficiency as a professional stone/marble restorator.

- Extremely durable with all metal construction.
- 1.5 HP dual capacitor.
- 6" solid flip up wheels.
- Unique *Pivot System* for precision balance and maneuverability.
- Solution tank "ready" system.
- Die cast switchbox.
- Dual non-conductives switch levers.
- No extra weights needed.
- 5 years motor and gear box warranty.



MBL-17	Cable	Current	Gear Box	Motor AC	Pad Size	Pad Speed	Weight
MBL-17	50 ft (15.2 m)	15 amp (120V) / 8,3 amp (230V)	Triple Planetary	1 1/2 hp (1,119 w)	17" (43.2 cm)	175 rpm	150 lbs (68.3 kg)

*Brushes, pads, pad drivers and solution tank available.



DC Series

ULTRA HIGH SPEED BURNISHERS



DC Series General Floorcraft's line of ultra high speed burnishers delivers excellent gloss on a variety of floor finishes.

- Includes a red 50ft (15.2 m) safety cable with waterproof jacket.
- Free floating non-locking handle.
- Pad pressure adjustable system on 2000 DC-4 model.
- Shock absorbing Non-marking wheels.
- Offers operation comfort and safety.
- Designed for full pad contact.
- All one piece aluminum pulley.
- 2 years power train warranty.



2000 DC-4

1500 DC-1

DC SERIES	Current	Motor DC Rectified	Pad Size	Pad Speed	Weight
1500 DC-1	15 amp (115V) / 8 amp (230V) - 50/60 Hz	1½ hp (1,119 w)	20" (50.8 cm)	1,500 rpm	90 lbs (40.8 kg)
2000 DC-4	15 amp (115V) / 8 amp (230V) - 50/60 Hz	1½ hp (1,119 w)	20" (50.8 cm)	2,000 rpm	94 lbs (42.6 kg)

*Burnishing pads available.



AM-3000

AIR MOVER



GENERAL
FLOOR MAINTENANCE EQUIPMENT

WARNING!
NOT INTENDED FOR OUTDOOR USE
TO PREVENT THE RISK OF SHOCKING
DO NOT EXPOSE TO DAMPING WATER OR
RAIN. CONNECT TO A GFCI OUTLET
DO NOT USE AN EXTENSION CORD

AVERTISSEMENT!
NE PAS UTILISER POUR UNE APPLICATION À L'EXTÉRIEUR
POUR PRÉVENIR LE RISQUE DE CHOC ÉLECTRIQUE
NE PAS EXPOSER À L'EAU OU À LA PLUIE TOUJOURS
UTILISER UNE PRISE DE COURANT GFCI NE PAS
UTILISER UNE ALLONGE

ON/OFF

SPFC
Total Load: 3 Amps
15 amp Resistance

The AM-3000 with on board GFCI and dual receptacle allows daisy chain capabilities for up to 5 units on a single 15-amp circuit.

- It offer's maximum airflow while consuming just 2.5 amps.
- Offers three positions, a Built-in cord wrap, stackable, 2-speeds and a powerful 3000 FPM of air which makes it perfect for carpet cleaners or restoration technicians.
- Great for drying carpets, rugs, padding, basements, attics, subflooring, flood restoration.
- It can also be used for general air circulation, drying paint, furniture, draperies, restrooms or even mats at entrance ways.
- 7 years limited warranty.



HORIZONTAL



45°



VERTICAL

AM-3000	
Air Flow Rate	3000 FPM (15.3 m/s)
Amperage	2.5 High / 2.3 Low
CFCI	Yes with Dual Receptacle
Certifications	UL & CUL
Current	120 V
Motor	1/3 hp (746 w)
Net Weight	30 lbs (13.6 kg)
Power Cord	25 ft (7.62 m)
Speeds	2-Speeds



GFCI



G-STEAM

INDUSTRIAL STEAMER



G-Steam with vacuum, features an extra large 5.6 gallon (22 L) recovery tank with an automatic water reload system for non-stop steam at 284° F (140° C).

- Great on grout, walls, carpeting, blinds, gum, windows, sinks, mattresses, shower molds, kitchens, bathrooms, etc.
- Clean, sanitize, deodorize and helps to reduce any bacteria in one pass.
- Perfect for daycares, food service facilities, hotels, gyms, nursing homes, restaurants, hospitals, veterinary clinics, schools, etc.
- Complete with two hose attachments and 16 different accessories to tackle any tough job.
- Control knob to regulate the flow of steam.
- Complies with the requirement of the directive HACCP.
- Stainless steel tank.
- 1 year limited warranty.

G-STEAM	
Air Flow Rate	100 CFM (170 m ³ /h)
Boiler Capacity	.46 Gal (2.2 L)
Capacity Tank	5.65 Gal (22 L)
Current	120 V
Height	30.5 in (775 mm)
Input Power	1,800 w
Maximum Input Temperature	284° F (140° C)
Motor (Ametek)	1.68 hp (1,250 w)
Motor Type	2-stage
Output Steam Pressure	65.5 psi (4.5 bar)
Power Cord	30 ft (9.1 m)
Sound Level	60 dBA
Waterlift	61 in (1,530 mm h ² o)
Water Tank	2.90 Gal (8 L)
Weight	48.5 lbs (22 kg)





G-60 AQUA

WET/DRY VACUUM



CE **PG** **CE** **GS**
UNI EN ISO
9001:2008

G-60 Aqua with its dual filtration combination captures 99.9% of the dirt, making the air you breathe cleaner and healthier.

- Features a high performance bypass motor.
- Four casters for stability, polyester cartridge filter and a see-through tank.
- Excellent for pet owners, hotels, motels, casino, hospitals and traps acarus (mites, bedbugs and ticks), printer toner and even asbestos will stay in the water and not back in the air.
- No disposable bags needed.
- Water trapping dirt filtration system.
- 1 year limited warranty.



Vacuum	G-60 Aqua
Air Flow Rate	152 CFM (258 m ³ /h)
Capacity	5.55 Gal (21 L)
Current	120 V
Height	22 in (559 mm)
Motor (Ametek)	1.68 hp (1,250 w)
Motor Type	Single
Power Cord	30 ft (9.1 m)
Sound Level	60 dBA
Water lift	61 in (1,530 mm h ₂ o)





G-60 & G-100

WET/DRY VACUUMS



G-60 & G-100 are practical heavy duty vacuums with professional and compact design.

- Both constructed with a stainless steel tank for durability.
- Complete with multi- attachments that can tackle any tough job.
- Ideal for home use, workshops, factories.
- Quiet enough for offices, schools, malls, hotels, etc.
- Four caster configuration promotes stable maneuverability.
- 1 year limited warranty.

Vacuum	G-60	G-100
Air Flow Rate	100 CFM (170 m ³ /h)	100 CFM (170 m ³ /h)
Capacity	6.1 Gal (23 L)	9.8 Gal (37 L)
Current	120 V	120 V
Height	22.5 in (572 mm)	22.5 in (572 mm)
Motor (Ametek)	1.68 hp (1,250 w)	1.68 hp (1,250 w)
Motor Type	2-stage	2-stage
Power Cord	28 ft (8.5 m)	28 ft (8.5 m)
Sound Level	60 dBA	60 dBA
Waterlift	88.5 in (2,250 mm h ₂ o)	88.5 in (2,250 mm h ₂ o)





WARNING - To Reduce Risk of Electric Shock -
Do not expose to rain. Store indoors
CAUTION - To Reduce Risk of Injury From
Moving Part - Unplug Before Cleaning or Servicing

 **GENERAL**
FLOOR MAINTENANCE EQUIPMENT

WARNING - To Reduce Risk of Electric Shock -
Do not expose to rain. Store indoors
CAUTION - To Reduce Risk of Injury From
Moving Part - Unplug Before Cleaning or Servicing

 **GENERAL**
FLOOR MAINTENANCE EQUIPMENT



G-200


WET/DRY VACUUM



G-200 is a professional and heavy duty vacuum that offers durability. Constructed with a durable polypropylene tank.

- Effective for any size job.
- Complete with multi- attachments that can tackle any tough job.
- Ideal for commercial use, factories, car washers, workshops, .
- Quiet enough for offices, schools, malls, hotels, etc.
- Large rear wheels and swivel front casters for easy maneuverability.
- Features 2 independent Ametek motors.
- Available front mount squeegee.
- 1 year limited warranty.

Vacuum	G-200
Air Flow Rate	200 CFM (340 m ³ /h)
Capacity	20.34 Gal (77 L)
Current	120 V
Height	41 in (1,041 mm)
Motor (total)	3.2 hp (2,400 w)
Motor Type	2-stage
Power Cord	28 ft (8.5 m)
Sound Level	67 dBA
Water lift	88.5 in (2,250 mm h ² o)

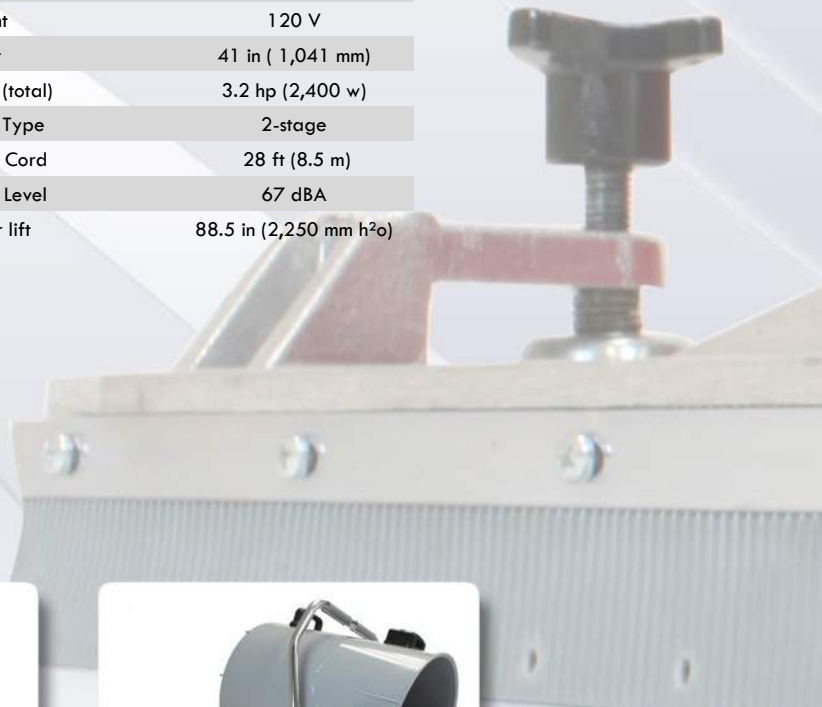



WARNING: To Reduce Risk of Electric Shock
Do not operate on wet, slick surfaces
CAUTION: To Reduce Risk of Injury From
Moving Parts: Always Before Cleaning or Servicing

 **GENERAL**
FLOOR MAINTENANCE EQUIPMENT

CE

 TUV
SUD
NRTL
US

CE 
UNI EN ISO
9001:2008



Solution Tank

ACCESSORIES

Our 4 gallon solution tank for our line of floor machines, features brass hardware and a flow control valve that allows operators to properly manage the amount of solution used during cleaning. An extra-wide opening makes tank filling easier and helps prevent chemical spills. Our machines are Intertek certified with the solution tank on them.

- Mounting hardware included.
- Durable construction.
- 4 gallon capacity.
- See-thru tank.
- Easy to set up.
- Solution control valve.



Brushes & Pads

ACCESSORIES

Full line of rotary brushes available. Including pad drivers, scrubbing brushes, carpet shampoo brushes, grit brushes and specialty brushes for stone and concrete. Whether the application is stripping, general scrubbing, or hard surface polishing, General Floorcraft offers a diverse line of material options including nylon, polypropylene, wire, natural fiber and specialty brushes.





6312 NW 99th Ave. Miami, FL 33178.

Phone: 305-477-1557 / Fax: 305-477-1558

www.genfloor.com